


# Ejector Sleeves (European)

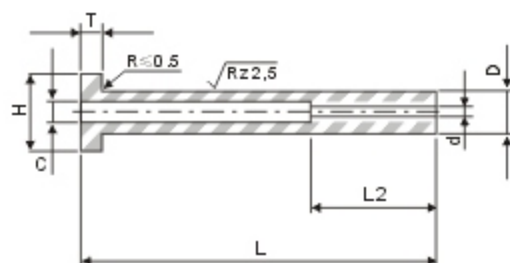

**Type: JC07**

Standard: **DIN16756** /ISO8405

Material: 1.2344 Hot Die Steel

Hardness:

Core+Head = HRC45+/-5


Surface ID & OD = HRC64-75 Through Nitrided

D g6	d H5	H 0 -0.3	T 0 -0.05	L2	L3						
					50~200	201~300	301~400	401~500	501~600	601~700	701~
4	2-2.5	8	3	35	•	•	•	•			
4.5	2-3				•	•	•	•			
5	2-3.5	10	5	45	•	•	•	•	•	•	•
5.5	2-4				•	•	•	•	•	•	•
6	2-4.5	12	5	45	•	•	•	•	•	•	•
6.5	2-5				•	•	•	•	•	•	•
7	2.5-5.5	14	5	45	•	•	•	•	•	•	•
8	3-6				•	•	•	•	•	•	•
9	3.5-7	16	5	45	•	•	•	•	•	•	•
10	3.5-7				•	•	•	•	•	•	•
11	3.5-8	20	7	45	•	•	•	•	•	•	•
12	3.5-8				•	•	•	•	•	•	•

Order Example:  -  -  -   
 -  -  -

■ Customize are also available

# Stepped Ejector Sleeves (European)

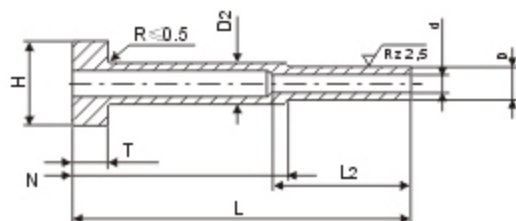

## Type: JC08

Standard: **DIN16756** / ISO8405

Material: 1.2344 Hot Work Die Steel

Hardness:

Core+Head = HRC45+/-5


Surface ID & OD = HRC64-75 Nitrided

D 0 -0.05	D2 g6	d H5	H 0 -0.3	T 0 -0.05	L2	L						
						50~200	201~300	301~400	401~500	501~600	601~700	701~
4	3~11	2-2.5	8	3	35	•	•	•	•			
4.5		2-3				•	•	•	•			
5		2-3.5	10	5	45	•	•	•	•	•	•	•
5.5		2-4				•	•	•	•	•	•	•
6		2-4.5	12	5	45	•	•	•	•	•	•	•
6.5		2-5				•	•	•	•	•	•	•
7		2.5-5.5	14	5	45	•	•	•	•	•	•	•
8		3-6				•	•	•	•	•	•	•
9		3.5-7	16	5	45	•	•	•	•	•	•	•
10		3.5-7				•	•	•	•	•	•	•
11		3.5-8	20	7	45	•	•	•	•	•	•	•
12		3.5-8				•	•	•	•	•	•	•

Order Example:  -  -  -  -  -

-  -  -  -  -

■ Customize are also available

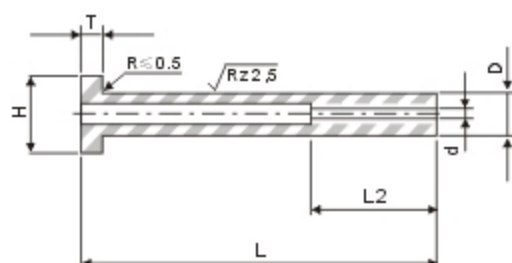

### Type: JC16

Standard: JIS

Material: SKD61 Hot Work Steel

Hardness:

Core+Head = HRC45+/-5

Surface ID & OD = HRC64-75 Through Nitrided

D	d H7	H 0/-0.3	T 0/-0.05	L 0/+3													
				100	150	200	250	300	350	400	450	500	550	600	650	700	
4	2	8	6	•	•	•	•	•									
	2.5			•	•	•	•										
4.5	2.0	9		•	•	•	•	•	•								
	3			•	•	•	•	•	•	•	•	•	•	•	•	•	
5	3.0	9		•	•	•	•	•	•	•	•	•	•	•	•	•	
	3.5			•	•	•	•	•	•	•	•	•	•	•	•	•	
5.5	2.5	10		•	•	•	•	•	•	•	•	•	•	•	•	•	
	3.0			•	•	•	•	•	•	•	•	•	•	•	•	•	
6	4			10	•	•	•	•	•	•	•	•	•	•	•	•	•
	2.5				•	•	•	•	•	•	•	•	•	•	•	•	•
6	3.5			10	•	•	•	•	•	•	•	•	•	•	•	•	•
	4				•	•	•	•	•	•	•	•	•	•	•	•	•
6.5	4.5		11	•	•	•	•	•	•	•	•	•	•	•	•	•	
	3.0			•	•	•	•	•	•	•	•	•	•	•	•	•	
7	4.0			11	•	•	•	•	•	•	•	•	•	•	•	•	•
	5				•	•	•	•	•	•	•	•	•	•	•	•	•
7	3.5			11	•	•	•	•	•	•	•	•	•	•	•	•	•
	4.5				•	•	•	•	•	•	•	•	•	•	•	•	•
8	5.5	13		•	•	•	•	•	•	•	•	•	•	•	•	•	
	4.0			•	•	•	•	•	•	•	•	•	•	•	•	•	
8	5.0			13	•	•	•	•	•	•	•	•	•	•	•	•	•
	6				•	•	•	•	•	•	•	•	•	•	•	•	•
9	4.5			14	•	•	•	•	•	•	•	•	•	•	•	•	•
	5				•	•	•	•	•	•	•	•	•	•	•	•	•
9	6.5		14	•	•	•	•	•	•	•	•	•	•	•	•	•	
	4.5			•	•	•	•	•	•	•	•	•	•	•	•	•	
10	7.0		15	•	•	•	•	•	•	•	•	•	•	•	•	•	
	5.5			•	•	•	•	•	•	•	•	•	•	•	•	•	
10	7.5		15	•	•	•	•	•	•	•	•	•	•	•	•	•	
	4.5			•	•	•	•	•	•	•	•	•	•	•	•	•	
11	6.0	16	•	•	•	•	•	•	•	•	•	•	•	•	•		
	7.5		•	•	•	•	•	•	•	•	•	•	•	•	•		
11	8	16	•	•	•	•	•	•	•	•	•	•	•	•	•		
	4.5		•	•	•	•	•	•	•	•	•	•	•	•	•		
12	6.0	17	•	•	•	•	•	•	•	•	•	•	•	•	•		
	7.5		•	•	•	•	•	•	•	•	•	•	•	•	•		
12	8	17	•	•	•	•	•	•	•	•	•	•	•	•	•		
	4.5		•	•	•	•	•	•	•	•	•	•	•	•	•		

Order Example: Type - D - d - L - L2  
 JC16 - 4 - 2 - 100 - from Request

Customize are also available