


Stripper Bolts -Male Screw Type-

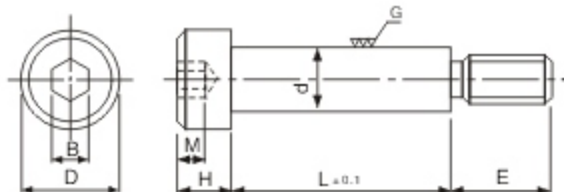

Type: JS78

Material: SCM435 -1.7220 - Chrome Molybdenum Steel

Hardness: HRC38~44 Through Carburizing

Size		φ6	φ8	φ10	φ12	φ16	φ20
d	Max	5.981	7.981	9.987	11.984	15.984	19.980
	Min	5.951	7.951	9.951	11.941	15.941	19.928
Pitch		M5-P0.8	M6-P1.0	M8-P1.25	M10-P1.5	M12-P1.75	M16-P2.0
E		9.75	11.25	13.25	16.40	18.40	22.40
D		10.0	13.0	16.0	18.0	24.0	30.0
H		4.5	5.5	7.0	9.0	11.0	14.0
B		3.0	4.0	5.0	6.0	8.0	10.0
M		2.4	3.3	4.2	4.9	6.6	8.8

L	d	φ5	φ6	φ8	φ10	φ12	φ16	φ20	φ24
		M4-P0.7	M5-P0.8	M6-P1.0	M8-P1.25	M10-P1.5	M12-P1.75	M16-P2.0	M20-P2.5
6		●	●						
8		●	●	●					
10		●	●	●	●				
12		●	●	●	●	●			
14						●			
15				●	●				
16		●	●	●	●	●	●		
18					●				
20		●	●	●	●	●	●	●	
25		●	●	●	●	●	●	●	
30		●	●	●	●	●	●	●	
35		●	●	●	●	●	●	●	
40		●	●	●	●	●	●	●	
45		●	●	●	●	●	●	●	
50		●	●	●	●	●	●	●	●
55		●	●	●	●	●	●	●	●
60		●	●	●	●	●	●	●	●
65			●	●	●	●	●	●	●
70			●	●	●	●	●	●	●
75			●	●	●	●	●	●	●
80			●	●	●	●	●	●	●
85			●	●	●	●	●	●	●
90			●	●	●	●	●	●	●
95			●				●		
100			●	●	●	●	●	●	●
110				●	●	●	●	●	●
120				●	●	●	●	●	●
130				●	●	●	●	●	●
140				●	●	●	●	●	●
150				●	●	●	●	●	●

Order Example: - -
 - -

■ Customize are also available